


ADAPTADORES: **UNION GUIBAULT EN FUNDICION DUCTIL** **DUCTIL COUPLING FOR PVC**



MATERIALES: **PRESION DE SERVICIO PN-16**
COMPONENTS: **MAX. PRESSURE PN-16**

1	CUERPO/BODY	FUNDICION DUCTIL GGG-50/DUCTIL IRON
2	CONTRABRIDA/BRACKET	FUNDICION DUCTIL GGG-50/DUCTIL IRON
3	GOMA/RUBBER SEAL	E.P.D.M./E.P.D.M.
4	TORNILLO/BOLT	ACERO 8.8 RECUBRIMIENTO ANTICORROSION/STEEL WITH ANTICORROSION COATING

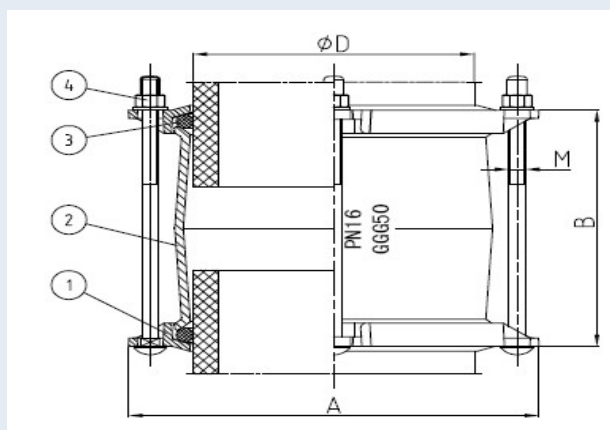

CODIGO	DIAMETRO SIZE	Ø	A	B	N-M	PESO/WEIGHT
UP441050	50	50	128	113	2-M12X140	1.16
UP441063	63	63	142	126	2-M12X150	1.64
UP441075	75	75	157	128	2-M12X160	2.02
UP441090	90	90	173	138	2-M12X160	2.36
UP441110	110	110	197	138	3-M12X160	3.43
UP441125	125	125	211	138	3-M12X160	3.71
UP441140	140	140	228	156	3-M12X170	5.15
UP441160	160	160	249	169	4-M12X210	5.98
UP441200	200	200	292	180	4-M12X210	7.55
UP441250	250	250	348	187	4-M12X210	11.52
UP441315	315	315	419	192	6-M12X220	14.94
UP441400	400	400	503	192	6-M12X220	19.38
UP441500	500	500	611	210	10-M12X250	31.58
UP441630	630	630	738	210	10-M12X250	42.19

