




VALVULAS: **VÁLVULA DE ACOMETIDA/SERVICE CONNECTION VALVE**

MATERIALES/_COMPONENTS

1	HUSILLO/STEM	ACERO INOXIDABLE AISI-420/STAINLESS STEEL
2	GORRO/BONNET	FUNDICION DUCTIL GGG-50/DUCTIL IRON
3	ARANDELA DE CIERRE/THRUST COLLAR	LATON MS-58/BRASS MS-58
4	GOMA DE CIERRE GORRO/O-RING	NBR/NBR
5	TORNILLO/BONNET	ACERO INOXIDABLE A-2/ STAINLESS STEEL
6	COMPUERTA/WEDGE	BRONCE + E.P.D.M/BRONZE+EPDM
7	EXTREMOS ROSCADOS/ INTERNAL THREAD	ROSCA GAS/BSP

MEDIDA/SIZE	C	Dmm	Lmm	Hmm	PESO KG. WEIGHT
20	3/4"	47	117	184	3
25	1"	47	117	184	3
32	1 1/4"	58	138	192	4
40	1 1/2"	62	154	204	5
50	2"	76	182	214	6

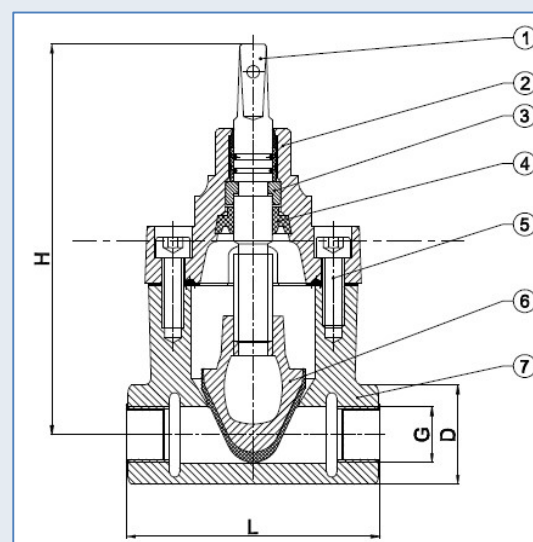

GRUPO ALMAGROMUR, S.L. Pol.Ind.La Polvorista C/cieza S/N 30500-MOLINA DE SEGURA (MURCIA) (968-616060 Fax: 968-612953

* comercial@grupoalmagromur.es