


ADAPTADORES: **UNION GUIBAULT EN FUNDICION DUCTIL**



MATERIALES: **PRESION DE SERVICIO PN-16**

1	CUERPO	FUNDICION DUCTIL GGG-50
2	CONTRABRIDA	FUNDICION DUCTIL GGG-50
3	GOMA	E.P.D.M
4	TORNILLO	ACERO 8.8 RECUBRIMIENTO ANTICORROSION

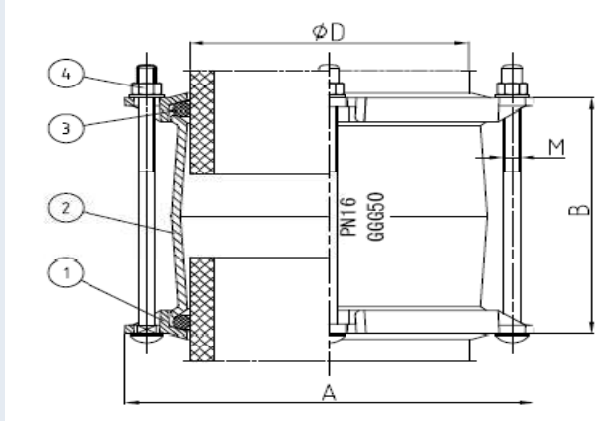

DIAMETRO	50	63	75	90	110	125	140	160	200	250	315	400
D	50	63	75	90	110	125	140	160	200	250	315	400
A	128	142	157	173	197	211	228	249	292	348	419	503
B	120	143	147	145	165	165	168	202	204	227	230	230
M	2M12 X150	2M12X 170	2M12X 170	3M12X 170	3M12X 190	3M12X 190	4M12X 190	4M12X 230	4M12X 230	6M12X 260	6M12X 260	6M12X 260
PESO	1.30	2,00	2.34	3.00	3.90	4.30	5.70	7.10	8.80	14.20	18.40	24.20