


ADAPTADORES **COLLARIN FUND. DUCTIL PARA PVC Y P.E. PN-16** **SADDLE FOR PVC- P.E.A.D TUBE PN-16**



MATERIALES/COMPONENTS

1	PARTE SUPERIOR HEMBRA/UPPER CLAMP	FUNDICION DUCTIL GGG50/DUCTIL IRON GGG-50
2	RECUBRIMIENTO INTER. GOMA/O RING	COMPLETO EN E.P.D.M
3	ROSCA EXTERIOR/EXTERNAL THREAD	ROSCA GAS/GAS THREAD
4	PARTE INFERIOR MACHO/LOWER CLAMP	FUNDICION DUCTIL GGG50/DUCTIL IRON GGG-50
5	TORNILLOS Y ARANDELA (4 UD)/SCREW & WASHER	ACERO INOX.A-2 M- 8X40/STAINLESS STEEL M-8X40
6	TORNILLO ROSCADO A CUERPO DE COLLARIN	SCREW THREADED TO COLLAR BODY
7	RESINA EPOXI APLICADA ELECTROSTATICAMENTE INTERIOR Y EXTERIORMENTE CON UN MINIMO DE 250 MICRAS/EPOXI COATING MIN. 250 MICR.	

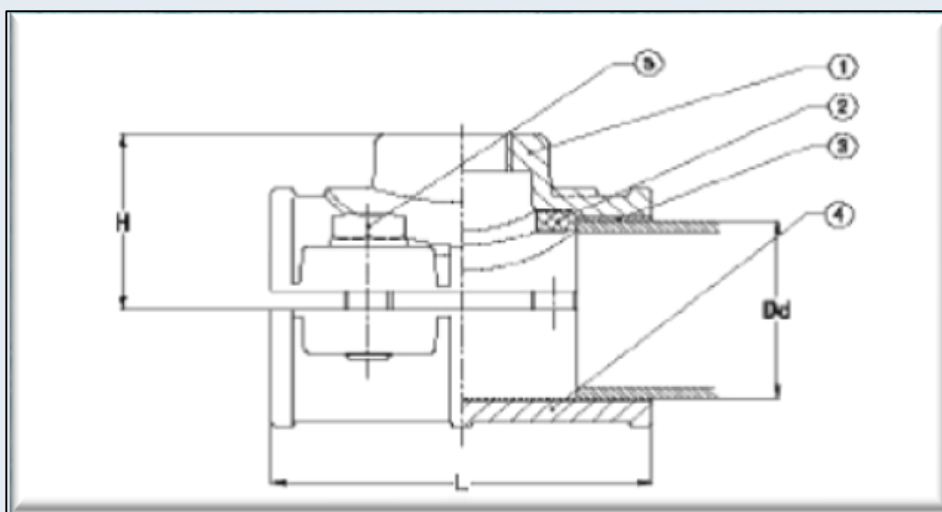

GRUPO ALMAGROMUR, S.L Pol.Ind.La Polvorista C/cieza S/N 30500-MOLINA DE SEGURA (MURCIA) (968-616060 Fax: 968-612953

* Comercial@grupoalmagromur.es

Medida/Size	DN mm	Dd mm	L mm	H mm	PESO/WEIGHT KG.
40 3/4" Y 1"	40	40	80	35	0.60
50 3/4" Y 1"	50	50	80	40	0.80
63 3/4" - 1" - 1 1/4"	63	63	100	49	1.30
63 1 1/2" - 2"	63	63	100	49	1.30
75 3/4" - 1" - 1 1/4"	75	75	100	56	1.40
75 1 1/2" - 2"	75	75	100	56	1.40
90 3/4" - 1" - 1 1/4"	90	94	100	75	1.90
90 1 1/2" - 2"	90	94	100	63	1.60
110 3/4" - 1"	110	114	100	73	2.00
110 1 1/4" - 1 1/2" - 2"	110	114	100	73	2.00
125 3/4" - 1"	125	130	100	82	2.20
125 1 1/4"	125	130	100	82	2.20
125 1 1/2"	125	130	100	82	2.20
125 2"	125	130	100	82	2.20
125 2 1/2" - 3"	125	130	160	82	4.0
140 3/4" y 1"	140	145	125	95	3.30
140 1 1/4"	140	145	125	95	3.30
140 1 1/2"	140	145	125	95	3.30
140 2"	140	145	125	95	3.30
140 2 1/2" - 3"	140	145	160	95	4.80
160 3/4" - 1"	160	165	125	105	4.80
160 1 1/4"	160	165	125	105	4.80
160 1 1/2"	160	165	125	105	4.80
160 2"	160	165	125	105	4.80
160 2 1/2" - 3"	160	165	160	105	5.90
200 1" - 1 1/4"	200	206	125	125	5.50
200 1 1/2" - 2"	200	206	125	125	5.50
200 2 1/2" - 3"	200	206	160	130	8.10
250 1" - 1 1/4" - 1 1/2"	250	206	160	130	13.60
250 2" - 2 1/2" - 3"	250	255	160	160	13.60
315 1" - 1 1/4" - 1 1/2"	315	320	160	95	18.00
315 2" - 2 1/2" - 3"	315	320	160	195	18.00